# PIN HEADER 1.27mm(0.050″ )

## Specifications:

Current Rating: 1AMP
Contact Resistance: 30mΩmax.at DC 100 mA
Insulator Resistance: 1000MΩmin.at DC 500V
Voltage: AC 500V For 1 minute
Operating Temperature: -55° C—+105° C

## Material:

Contact: Phosphor Bronze
Housing: Nylon-6T&30% Glass Fible (UL94V-0)

## How To Order

112-B - S S 40 G 100
1 2 3 4 5 6
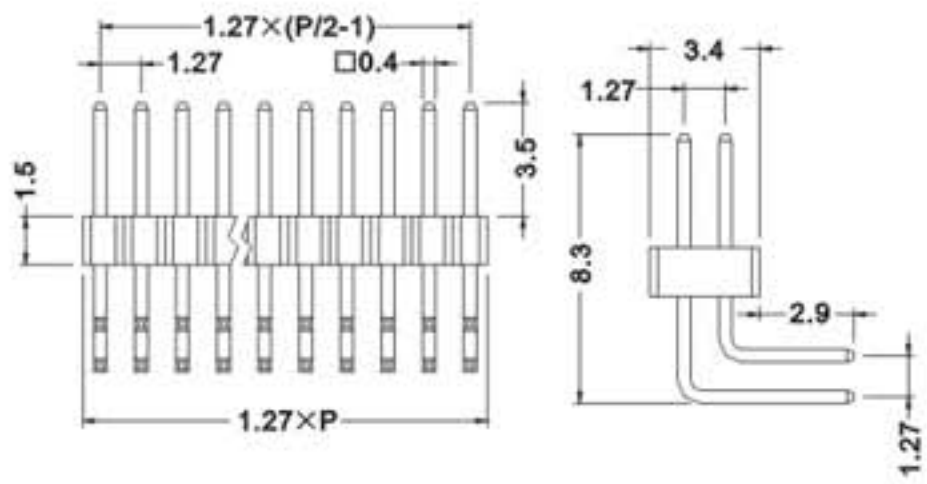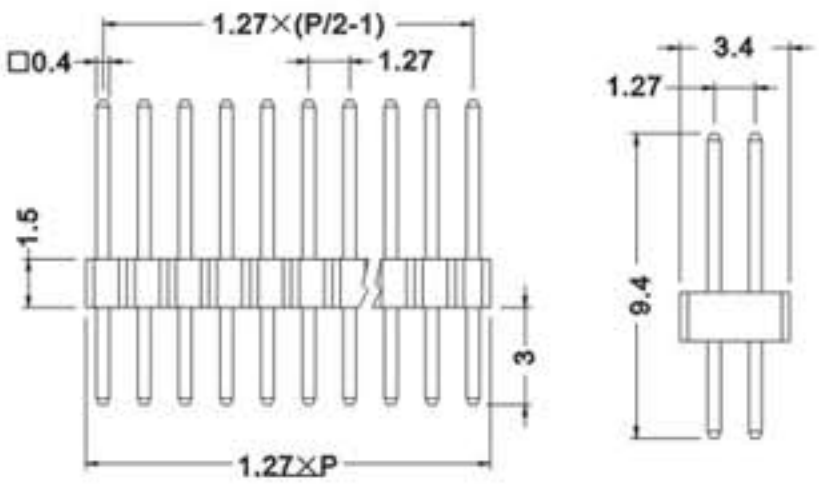
1 — SERIES NO
2 — ROW TYPE:
D-DOUBLE ROW
S-SINGLE ROW
3 — TERMINAL TYPE:
S-STRAIGHT TYPE
R-RIGHT ANGLE TYPE
4 — NO.OF PINS:
2 TO 100
5 — CONTACT PLATED:
T-ALL TIN PLATED
G-ALL GOLD PLATED
6 — PLASTICS HEIGHT:
100-1.00mm
150-1.50mm
160-1.60mm
200-2.00mm
254-2.54mm