



## P.L.C.C SOCKET

| Position | A     | B     | C     | D     |
|----------|-------|-------|-------|-------|
| 28       | 7.62  | 18.10 | 22.20 | 12.70 |
| 32       | 7.62  | 18.80 | 25.70 | 12.70 |
| 32       | 10.16 | 21.30 | 25.70 | 15.24 |
| 44       | 12.70 | 23.50 | 29.80 | 17.78 |
| 52       | 15.24 | 26.00 | 32.64 | 20.32 |
| 68       | 20.32 | 30.20 | 40.10 | 25.40 |
| 84       | 25.40 | 35.20 | 46.90 | 30.48 |


### Specifications:

Contact Resistance: 30m  $\Omega$  max.at DC 100 mA  
 Insulator Resistance: 1000M  $\Omega$  min.at DC 500V  
 Current Rating: 1AMP

### Dielectric Withstanding

Voltage: AC 500V For 1 minute  
 Operating Temperature: -55° C--+105° C  
 Contact: Phosphor Bronze  
 Housing: PPS &40% Glass Fiber(UL 94V-0)  
 PBT &30% Glass Fiber(UL 94V-0)

### How To Order

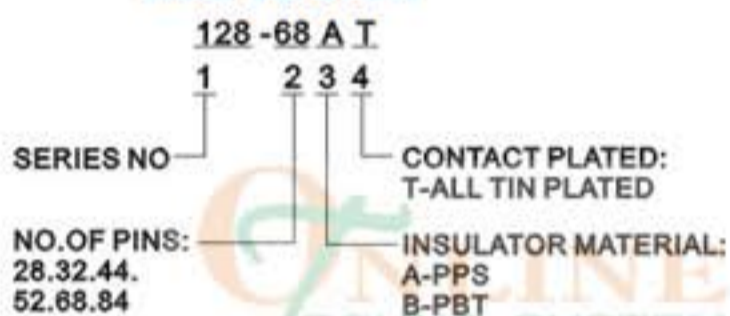

PERFECT CONNECTIVITY SOLUTION !

